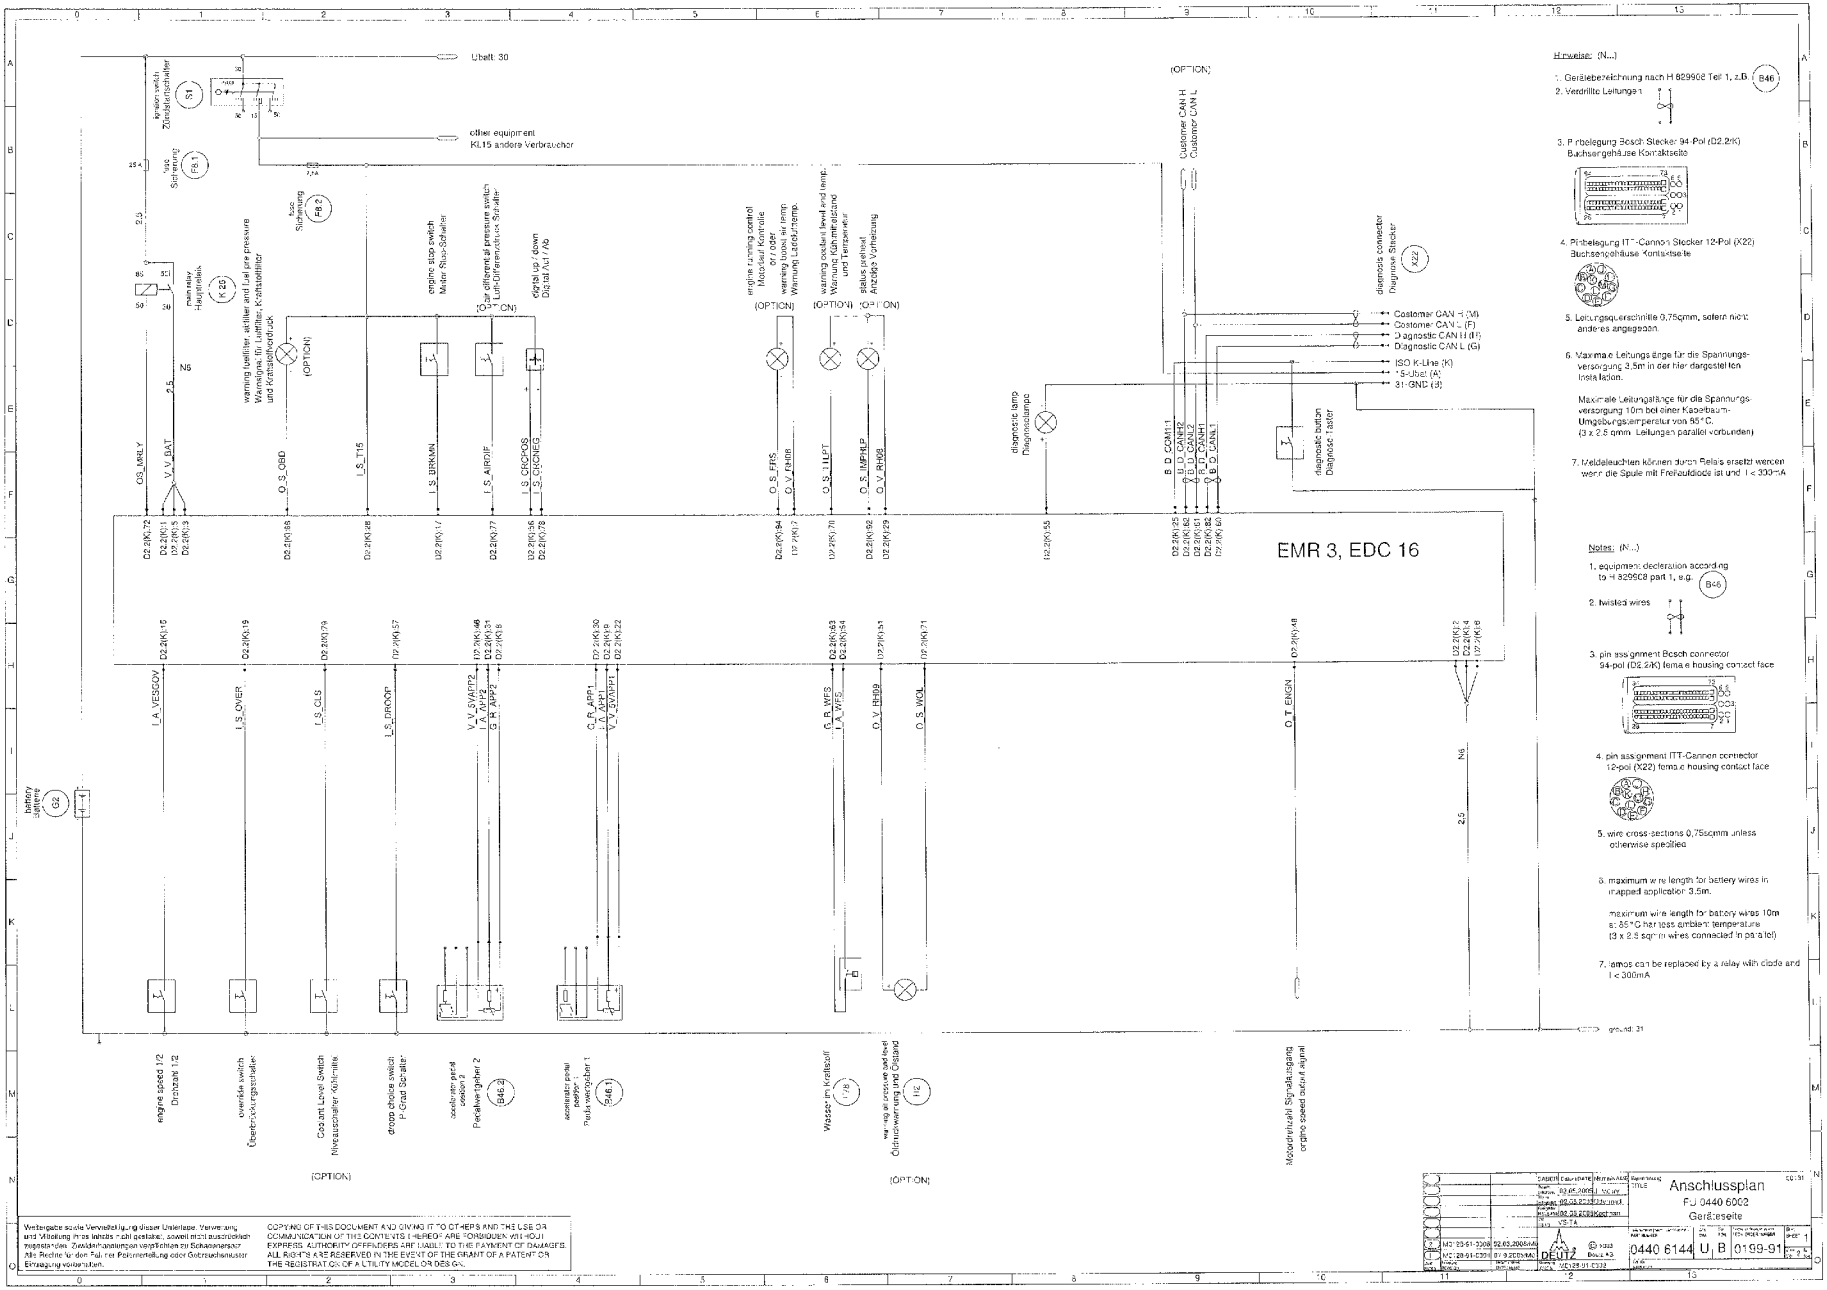

Hinweise: (N...)

1. Gerätebezeichnung nach H 829908 Teil 1, z.B. B46
2. Verdrillte Leitungen
3. Pinbelegung Bosch Stecker 94-Pol (D2.2/K) Buchsengehäuse Kontaktseite
4. Pinbelegung ITT-Cannon Stecker 12-Pol (X22) Buchsengehäuse Kontaktseite
5. Leitungsquerschnitte 0,75qmm, sofern nicht anders angegeben.
6. Maximale Leitungslänge für die Spannungsversorgung 3,5m in der hier dargestellten Installation.

   Maximale Leitungslänge für die Spannungsversorgung 10m bei einer Kabelbaum-Umgebungstemperatur von 85°C. (3 x 2,5 qmm Leitungen parallel verbunden)
7. Meldeleuchten können durch Relais ersetzt werden wenn die Spule mit Freilaufdiode ist und I < 300mA

Notes: (N...)

1. equipment declaration according to H 829908 part 1, e.g. B46
2. twisted wires
3. pin assignment Bosch connector 94-pol (D2.2/K) female housing contact face
4. pin assignment ITT-Cannon connector 12-pol (X22) female housing contact face
5. wire cross-sections 0,75sqmm unless otherwise specified
6. maximum wire length for battery wires in shapped applicator 3,5m.

   maximum wire length for battery wires 10m at 85°C hot loss ambient temperature (3 x 2,5 sqmm wires connected in parallel)
7. lamps can be replaced by a relay with diode and I < 300mA

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmustereintragung vorbehalten.

COPYING OF THIS DOCUMENT AND GIVING IT TO OTHERS AND THE USE OR COMMUNICATION OF THE CONTENTS THEREOF ARE FORBIDDEN WITHOUT EXPRESS AUTHORITY. OFFENDERS ARE LIABLE TO THE PAYMENT OF DAMAGES. ALL RIGHTS ARE RESERVED IN THE EVENT OF THE GRANT OF A PATENT OR THE REGISTRATION OF A UTILITY MODEL OR DESIGN.

Anschlussplan
FD 0440 6002
Geräteseite

DEUTZ

0440 6144 U B 0199-91